


Characteristics

- ❖ Cell efficiency exceeding 22.3 %
- ❖ 200W nominal power, high efficiency, and 5-busbar technology
- ❖ Enhanced heat tolerance compared to TPT modules, thanks to PCB-Backsheet.
- ❖ Semi-flexible, bendable up to a maximum of 18 degrees (lengthwise).
- ❖ Durable against saltwater, universally applicable
- ❖ ETFE high-tech plastic ensures weight savings and simultaneously high light transmittance.

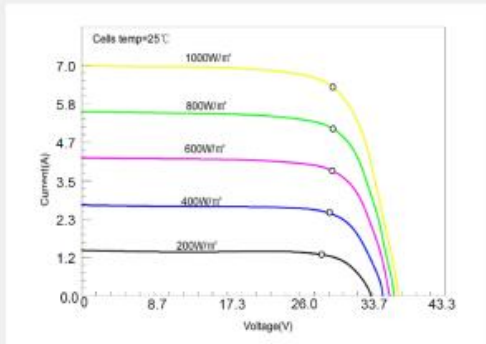

Specification

Article number	3-01-018415
EAN	4262440561688
Nominal peak power* (WP)	200 W
Nominal voltage (V)	30,8 V
Nominal current (A)	6,5 A
Open circuit voltage (V _{oc})	36,00 V
Short circuit current (I _{sc})	6,82 A
Max system voltage	200 V DC

*Measured under Standard Test Conditions STC (1000 W/m²; spectrum AM 1.5; Cell temperature 25 °C)

Measurements

Cells per module	3×18
Cells size (mm)	182×91 mm
Module size (mm)	1770×580×3 mm
Weight (kg)	5.02

Warranty: 10 years lifetime, and our workmanship warranty is 1 year.

Thermal attributes

NOCT	45 +/-2 °C
Voltage temp. coefficient	-0.36 %/°C
Current temp. coefficient	+0.07 %/°C
Power temp. coefficient	-0.38 %/°C

Additional specification

Power tolerance	+/-3 %
Cell Conversion efficiency	22,30 %
Operating temperature	-40 to +85 °C





Voltaik Holzner & Krenn GmbH
Kreuzleitenstrasse 22
A-4451 Garsten
Tel: +43(0)720111050
E-Mail: info@voltaik.shop
Web: <https://voltaik.shop>